

M.2 2280 SSD

IM2P41B8 (eTLC)



The ADATA IM2P41B8 PCIe Gen4x4 industrial-grade SSD employs 112-layer 3D eTLC NAND flash for high capacities and a PCIe Gen4x4 interface for excellent performance. Its 7K P/E cycle rating ensures long-lasting durability while a DRAM Buffer offers improved IOPS and read/write speeds. What's more, with LDPC ECC error correction and RAID Engine, the IM2P41B8 ensures data accuracy and integrity. The SSD comes in a range of capacities for different requirements. Customers can also benefit from ADATA's proprietary A+ SSSDTool software for easy management and real-time monitoring of ADATA SSDs. In addition, it supports AES 256-bit data encryption and TCG OPAL for improved data security. The IM2P41B8 is ideal for 5G, AIoT, Edge server, automation, networking, surveillance, and transportation applications.

Features

- PCIe Gen4x4 interface/ NVMe 1.4 compliant
- 112-layer 3D eTLC NAND flash for higher capacities and endurance
- 7K P/E cycle rating for great durability and reliability
- Comes in capacities up to 1.92TB
- DWPD=1.8
- DRAM Buffer
- AES 256-bit Data Encryption and TCG OPAL 2.0
- LDPC ECC error correction, RAID Engine, and End-to-End Data Path Protection
- Suitable for 5G, AIoT, Edge server, automation, networking, surveillance, and transportation applications


Ordering Information

Operating Temp.	480GB	960GB	1.92TB
0°C to 70°C	IM2P41B8-480GCTB5	IM2P41B8-960GCTB5	IM2P41B8-1T92CTB5

Specifications

Model	IM2P41B8 (eTLC)
Form Factor	M.2 2280
Capacity	480GB - 1.92TB
Interface	PCIe Gen4x4
Flash Type	112L 3D eTLC
Dimensions (L x W x H)	80 x 22 x 2.25mm
Sequential Read (Max.)	7000MB/s
Sequential Write (Max.)	6200MB/s
Operating Temperature (Standard)	0°C to 70°C
Operating Temperature (Industrial)	-
Operating Voltage	3.3V
Power Consumption (Max)	8W
Shock Resistance	1500G/0.5ms, Half Sine Wave
Operating Humidity	5%-95% RH, non-condensing
Vibration Resistance	20G (20-2000Hz)
Technologies	LDPC ECC, RAID Engine, Wear Leveling, SLC Cache, DRAM Buffer, TRIM command, Thermal Throttling, S.M.A.R.T. Monitor, AES 256-bit Data Encryption, TCG OPAL 2.0, End-to-End Data Path Protection, ESD Support (IEC/EN 61000-4-2 level 4)

Diagram

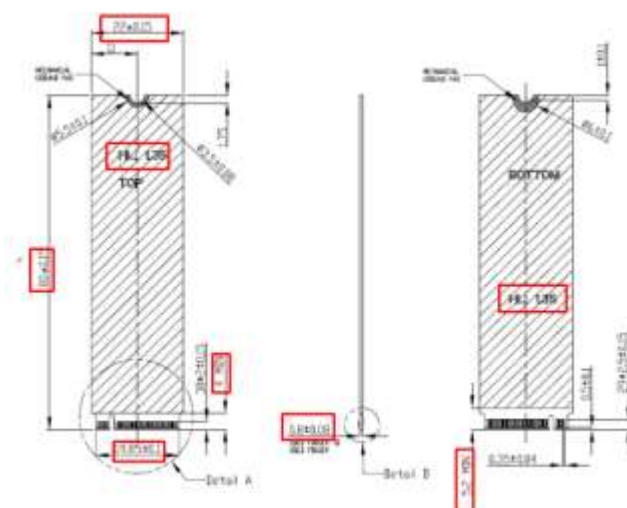

Unit: mm

Contact Us

HQ (Taiwan):

T: +886-8228-0886

E: IA_Global@adata.com

US:

T: +1-714-332-8708

E: IASales_us@adata.com

EU:

T: +49-899-0405-296

E: IASales_eu@adata.com

China

T: +86-21-6233-1010

E: IASales_cn@adata.com

JP:

T: +81-3-5807-0011

E: IASales_jp@adata.com

APAC/MEA:

E: IASales_apacmea@adata.com